



A Tenneco Company

www.gates.com/europe

024

25/08/08

Technical Bulletin

Tension setting procedure for PSA 2.0 HDI engines

GATES REFERENCE:	5588XS/K015588XS/K025588XS/KP15588XS
MAKE:	CITROEN, FIAT, LANCIA, PEUGEOT, SUZUKI
MODEL:	Various
ENGINE:	2.0 HDI, 2.0 JTD
ENGINE CODE:	DW10ATED4, RHW, RHM



In order to achieve optimum belt performance, it is always important that the correct installation tension and tensioning procedure is used.

This particular engine requires an unusual 2 stage belt tensioning procedure.

- The belt is fitted in the normal way and is tensioned by turning the tensioner pulley anticlockwise using, Gates tool GAT4567 or GAT4568, both included in Gates tool kit GAT4820 (PSA tool ref. 0188-J1 or 0188-J2) (Fig. 1).



Fig. 1

- This tool is needed in order to turn the tensioner and hold it in place while tightening the central bolt (23 Nm)(Fig. 2).

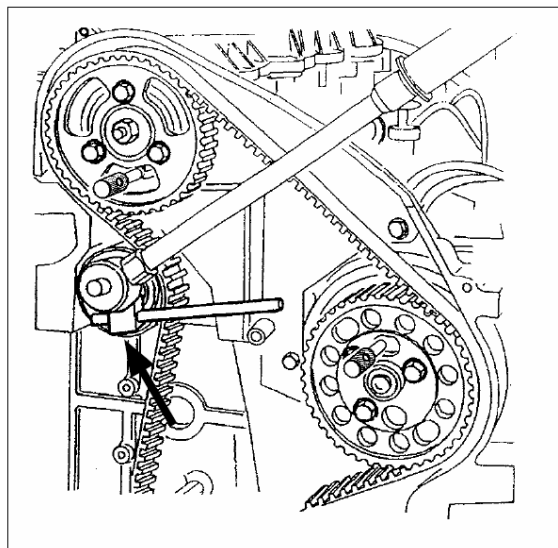


Fig. 2



A Tenneco Company

www.gates.com/europe

024

25/08/08

Technical Bulletin

- ① - Initially, the belt has to be installed at a higher than normal tension (pretension).
The tension is measured with a Gates STT-1 tension tester in the span between the camshaft and the injection pump. Enter code 3725
- ② - The crankshaft pulley is then rotated 8 revolutions, clockwise
- ③ - The tension is then adjusted to the final level, and the value is again confirmed with the STT-1 tension tester. Enter code 3998

This procedure has the advantage that the variability in the setting of the tension level is reduced, and the initial tension drop is also reduced.

The procedure will be visualised on the PowerGrip[®] Kit and belt box label as in Fig 3.

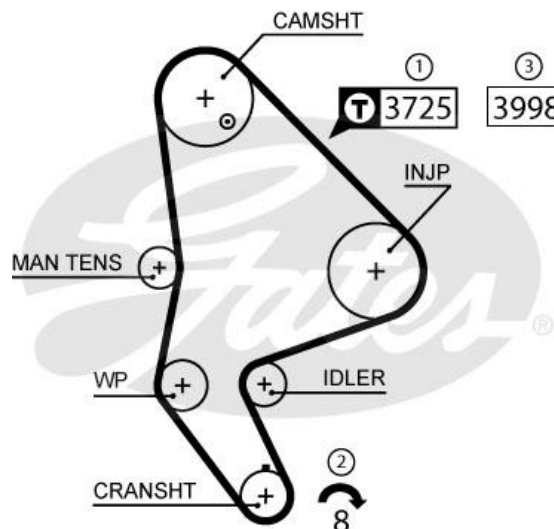


Fig. 3

Visit our web catalogue : www.gatesautocat.com